

Heavy Duty Shower Hinges - SOLID BRASS

Cutting guide

unscaled format

VTR-130 SERIES

SPECIFICATIONS

Glass Thickness: 5/16" - 1/2" (8-12mm) Tempered Safety Glass

Material: Solid Brass

Finishes: CP, BN, BR, ORB

Special Features: <15° With Automatic Closing; 0° And 5° Pre-set Closing Position

Max Door Capacities	Max. Weight	Max. Width
Using 2 Hinges	110 lbs (50kg)	36" (914mm)
Using 3 Hinges	140 lbs (60kg)	36" (914mm)

- *NOTE:** Choose proper quantity of hinges; Do not exceed max. Door weight or width
1. Do not exceed either maximum weight or width when choosing proper quantity of hinges.
 2. It is imperative that the glass panels be tempered after cutting.

Quality Vetroglass



- Walls and base
made of solid
brass!!!
Thickness: 4.5mm

Others



- Walls and base
base made of
hollow brass
Thickness: 2.5mm

VTR130 SERIES TEMPLATE

The hinge is designed to accommodate two types of cut-outs in the glass.

- > If the two steel pins in the body of the hinge are left in place, the "mouse ear" cut-out option should be used;
- > If the two steel pins are removed, the "rectangular" cut-out option can be utilized.


Heavy Duty Shower Hinges - SOLID BRASS

Cutting guide VTR-130 SERIES

unscaled format


"Mouse-Ear" (With pin)

For: 90° wall mount, 180° glass to glass, 135° glass to glass

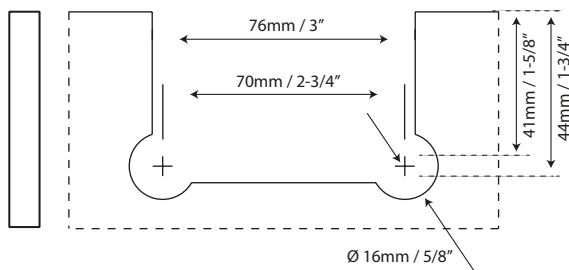


Rectangular (Removable pin)

For: 90° wall mount, 180° glass to glass, 135° glass to glass

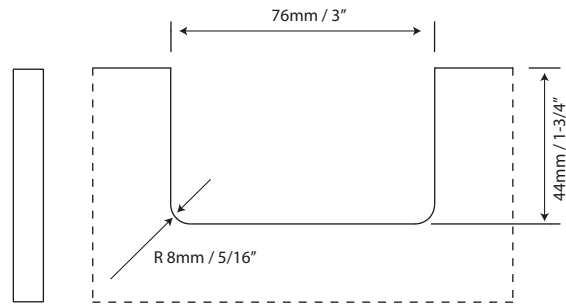

For: 135° glass to glass (mitered fixed panel)

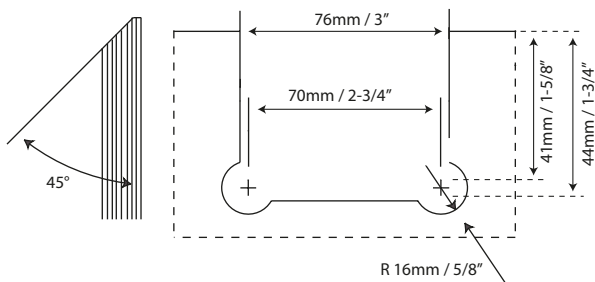

For: 135° glass to glass (mitered fixed panel)

